



HEADLINER FX FACADE

USER GUIDE



Assembly Instructions (4-Panel Headliner Facade)

STEP 1



Step 1. Connect the two double panel facade sections together by inserting the top and bottom hinge pins.

STEP 2



Step 2. Adjust each of the 4 sections to the desired angle you wish to achieve. Lock into place with the 3 security brackets located at the top of each section. Hand tighten the knobs to secure each panel into place.

STEP 3





Step 3. Adjust the 4 stabilizing feet located at the bottom of each panel to stabilize the entire façade.



STEP 4

STEP 5

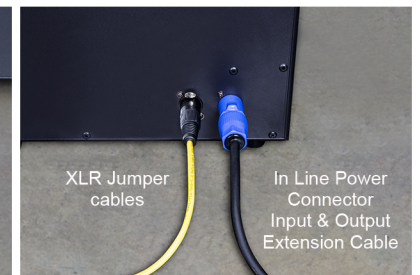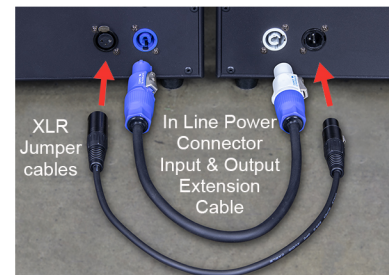

Step 4. Connect the power supply and the XLR jumper cables to the center where the two panels meet. This connection must be done first every time you set up your façade.

Step 5. Connect the facade to the control box using the yellow XLR/Cat 5 cable. Also, connect the facade to a power source using the In-line Power Connector Input & Output Extension cable.

Part Lists (4-Panel Headliner Facade)




- Step 1:** Connect the control box power cable to the Headliner controller.
- Step 2:** Connect the CAT5 to OUT1 and the XLR jack to the Headliner Facade IN.
- Step 3:** Plug In Line Power Connector power cable into the Headliner Facade.
- Step 4:** Insert SD card into the SD card slot.
- Step 5:** Switch the Headliner control box ON/OFF to ON position.

Headliner controller has a built-in MIC for sound active mode.

Optional - 3.5mm audio signal cable to audio source output for when increased bass DB is required.

Optional - DMX control via built-in XLR male cable.

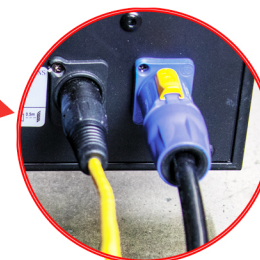

STEP 3

STEP 5

ON/OFF




STEP 1



Control box power cable connects to the Headliner controller

STEP 2

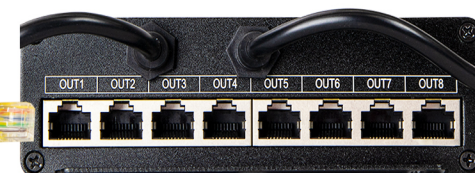

STEP 4



Optional Sound Active

Connect to audio signal output



3.5mm audio cable included.



Optional To DMX Controller

Connect to DMX controller

